DASQUAII 987& 988








Pasquali Tractors are compact and maneuverable with the same features as the bigger, more expensive tractors. Fuel consumption is less than half that of a similar class gasoline engine. Quality, and consequently durability, are built into each part that makes up this tractor. With the Pasquali you have a real tractor for small acreage farmers, hobby farmers, landscapers, nurseries, municipalities and the second tractor on a "Big Tractor" farm. Following are some highlights of this tractor:

- 4-wheel drive
- Air cooled diesel engine
- Front differential lock
- Articulation in the middle
- 9 speeds forward . . . 3 reverse
- Speeds from .37 mph to 15.22 mph
- 540 PTO . . . 750 PTO . . . Ground speed PTO
- Over 150 implements to fit tractor

DASQUAI 987 & 988

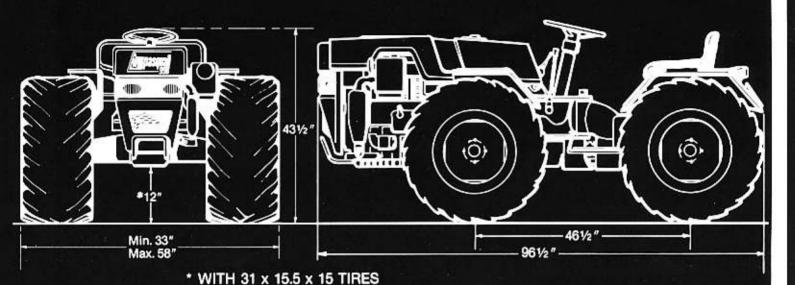

MODEL 987, 988 4-Wheel Drive Diesel Tractor Specifications

Engine (4 Stroke, Air Cooled Diesel)		
Model #	987	988
Mfg	Ruggerini	Lombardini
Brake horsepower	37 SAE H.P.	38 SAE H.P.
Rated Engine speed	3000 rpm	3000 rpm
Fuel economy	2400 rpm	2300 rpm
Peak torque	2400 rpm	2300 rpm
No. cylinders	2	2
Displacement	73.5 in ³	81.3 ln ³
Bore and stroke	3.74x3.35 in	3.74x3.70 in

STEERING

Articulated in center with worm gear oil bath steering.

Power steering (opt.) — Twin cylinder, full hydraulic control.

ELECTRICAL

Battery	12 volt, 92 amp hour
Starter	12 volt
Headlights.	
	nts 2 Front
# W	2 Post

BRAKES

Mechanical brakes on rear axle. Hand brake also comes as standard equipment — it operates independent of the main braking system.

HYDRAULIC LIFT

۰.	
	Independent hydraulic lift system.
	Direct drive, gear type pump.
	Hitch 3-point linkage
	System Category I
	Position controlYes
	Remote valve Optional
	그 이 사람들이 하는 것 같아요. 그는 것 같아요. 그는 것이 아니는 것 같아요. 그는 것이 없는 것 같아요. 그는 것이 없는 것이 없어요. 그 무슨 것이 없어요. 나는 것이 없는 것이 없어요. 그 그 것이 없는 것이 없는 것이 없어요. 그는 것이 없는 것이 없는 것이 없는 것이 없다면 없는 것이 없다면 없는 것이 없다면 없는 것이 없다면

DIMENSIONS

Wheel Base	461/2"
Maximum Height	431/2"
Length	
Weight	
Tires	7.50 x 16
(Front & Rear)	

TREAD ADJUSTMENT

Minimum									+		*			33"
Maximum								į			,			58"
(variable i	ncr	е	n	16	91	nt	s)						

MPH at rate engine RPM (3000)

	Range	Gear	MPH
Speeds:	Low	1st	.37
		2nd	.62
		3rd	1.43
		Reverse	.93
	Medium	1st	1.06
		2nd	1.68
		3rd	3.73
		Reverse	2.55
	High	1st	4.23
	ACCOSTANT.	2nd	6.84
		3rd	15.22
		Reverse	10.25

POWER TRAIN

TRANSMISSION

Sliding type key gear with synchronizer, 9 speeds forward, 3 reverse speeds.

DIFFERENTIAL

Differential on both axles.

Differential lock on front axle.

CLUTCH

8" diameter. Single dry disc PTO

Two PTO speeds - 540 rpm &

750 rpm PTO can also be synchronized with all tractor speeds.

The above specifications are subject to change without notice.

D25002 U.S.A. INC. 116 PAOLIST. P.O. BOX 7 VERONA, WI 53593 (608) 845-6438